


AIRLINK

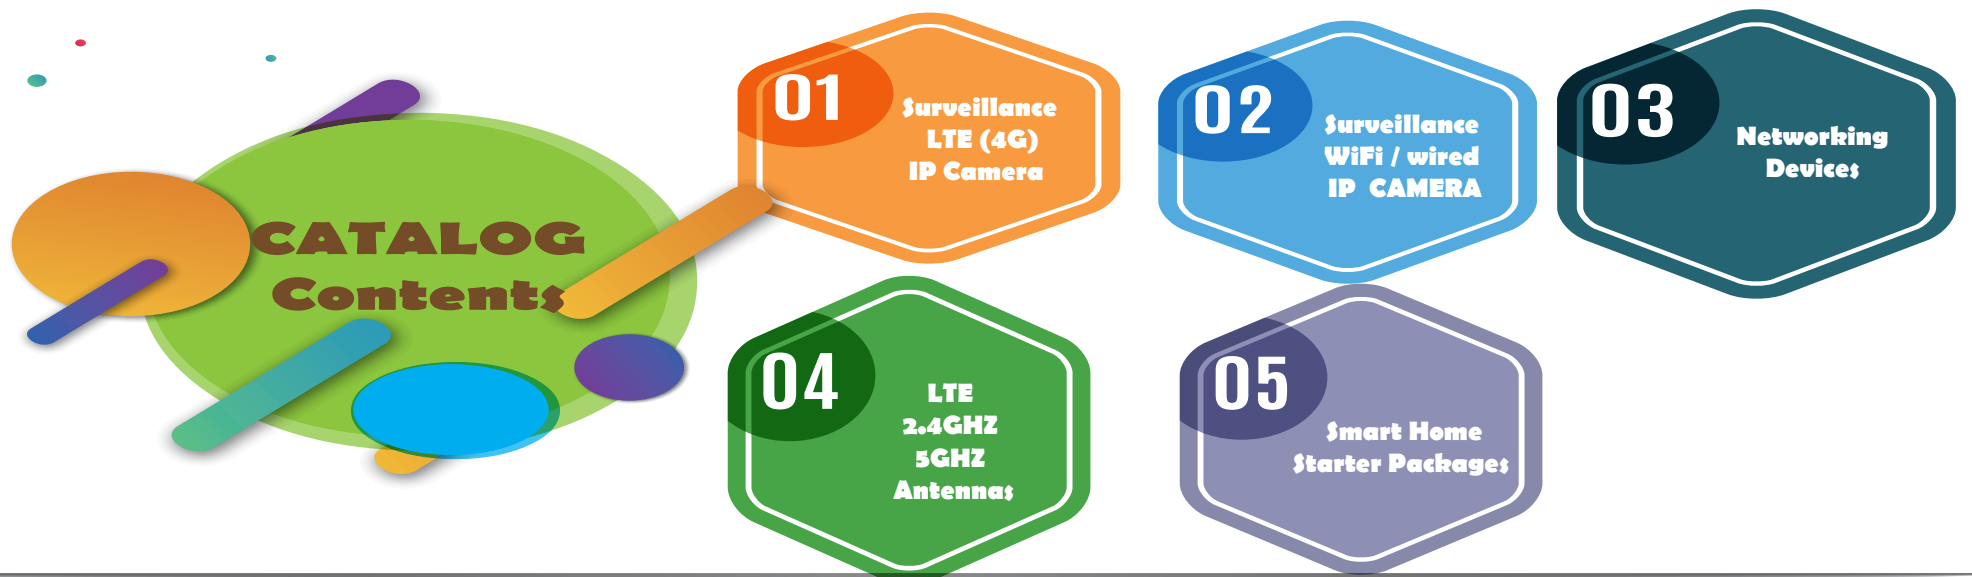

Company Overview

BROCHURE

AirLink iLife Inc. is a Taiwanese Company establish since 2006 as a designer and manufacturer company of RF radio and antennas with 2.4 GHz/5GHz wide area networks of Wi-Fi 802.11 high power devices, providing total solutions for Outdoors & Indoors Hotspots Networks.

In 2010 we expanded our product line providing Wireless Internet Cameras security system, developed as an easy plug in and play cloud system solution to take care of our customers family.

In 2013, we entered in the Green DC/AC Energy Power System; combining solar energy powering and AC/DC equipment like Indoors & Outdoors AP and IP cameras or CCTV cameras in a stable power .

In the same year we developed Access managements gateway/ controllers for our customers to manage their wide site of AP's bandwidth control and traffic management and login portal to create users, radius or vouchers login for guest firewall, VPN and VLAN etc.

In 2014 we developed ac access point (ac/b/g/n/) 1200Mbps & 733Mbps & MIMO mesh 11abgn 300Mbps outdoor AP.

In 2015 We embedded a TV Multimedia Hotel total solution Transforms your Hotel TV into a Powerful Smart TV, Multimedia Device and a Hotel Marketing

In 2016 we have done several solar power solution projects located in Japan and other countries

In 2017 continue to 2018 we focus developed 4G IP cameras and 4G LTE devices, by end of 2018 to 2020 we are concentrated in smart home IOT, solar 4G all in one IP camera and Artificial IOT to make All devices are connected wirelessly.

Smart house
Interoperability Intelligence

Creative process

01 02 03 04 05 06

Remote Access Control
Timer Schedule
Peace of Mind
Comfort

works with Google Assistant Amazon Alexa IFTTT

1 Power On AirLink Smart Home Control Unit
2 Connect it to your existing Router via LAN Cable
3 Install Smart Home Kits, Audio system, etc.
4 Enable CloudControl via a Free App on iOS, Android, Apple TV, SmartPhone, Tablet
5 Enjoy Your Smart Home

AIRLINK Smart Home Kits

AIRLINK

Smart Home Kits

Smart Home's Interoperability plus Intelligence

Surveillance LTE (4G) IP Camera

View angle
89.9°/75.7°/50°
based on lens



ASP83 2.0MP
1080P(1920*1080)
H.265



HMD

(Human Motion Detection-microwave)

CMS Linkage alarm function
Support voice pick up & speaker
Night mode: white lights +infrared
White light power: 2W LED 1W*2
Infrared power: 2W LED 0.5W*4
Solar Power 6W Embedded Battery 10400mAh
Detection angle: 120°

4GVR2.0MP 1080P(1920*1080)
4GVR3 3.0MP (2304HX1536V)



VR Fisheye Lens,
360 degree View



CMS Linkage alarm function;
Support voice pick up & speaker;
IR board: 3 LED array; IR distance: 15M;
Megapixel F20-ixed 1.56MM Lens,
support 128GB TF card
12V adaptor

4GVRB 2.0MP 1080P (1920*1080)



VR Fisheye Lens,
360 degree View



CMS Linkage alarm function
Support voice pick up & speaker
IR board: 3 LED array
IR distance: 15M
Megapixel F20-ixed 1.56MM Lens
Support 128GB TF card
Power AC 110V~240V



Two Way Audio

Radar detects
Pan tilt rotation.
horizontal:355°20°/S
vertical:90°20°/S

ASP80
2.0MP lens 6MM 7102C-1+2023
3.0MP lens 6mm HI3516EV200+SC3235
5.0MP lens 6mm HI3516EV300+IMX335
2.0MP 5X (2.7-13.5MM) HI3516EV200+SC2232
3.0MP 5X (2.7-13.5MM) HI3516EV200+SC3235
5.0MP 5X (2.7-13.5MM)HI3516EV300+IMX335

CMS Linkage alarm function
Support voice pick up & speaker
IR board: 4pcs Array Infrared LEDs or 2pcs White Supplement LEDs.
LED light full on 10W support always on, PIR or no moving object bright 2W
IR distance: 60M Night Vision
Built-in 15 meters recording function, built-in subwoofer can talk to 40 meters
2 antennas
Support 64GB TF card
Power 12V2A



ASP81 2.0MP/3.0MP/5.0MP

Pan tilt rotation.
horizontal:355°20°/S
vertical:90°20°/S



Two Way Audio

2.5" mini dome lens 2.7~13.5mm
CMS Linkage alarm function;
Support Wifi connection priority
Waterproof IP66 Power 12V2A
When someone approaches, turn on the
white light, activate the siren, and turn on
the red and blue flashing lights.
IR distance: 40M Night Vision

ASP34 960P (1280*960)
ASP35 1080P (1920*1080)



View angle
89.9°/75.7°/50°
based on lens

CMS Linkage alarm function
Support Wifi connection priority
IR board: 2 LED array
Optional 2.8/3.6/6mm lens
IR distance: 50M , Fixed 6MM Lens
Support 128GB TF card
Waterproof IP66, Power 12V 1A

ASP52 960P (1280*960)
ASP53 1080P (1920*1080)



View angle
89.9°/75.7°/50°
based on lens

Truck Camera

CMS Linkage alarm function;
Support Wifi connection priority
Waterproof IP66
18 PCS infrared LEDs
30m Night Vision
Fixed Lens 4 or 6 MM lens
Support 128GB TF card
Power Range 9~15V



Pan tilt rotation.
horizontal:300°
vertical:60°



Two Way Audio

ASP37 1080P (1920*1080)
CMS Linkage alarm function;
Support Wifi connection priority
IR board: 4 pcs LED array;
Pan tilt control, horizontal:300° &
vertical:60° , IR distance: 60M;
2.7-13.5mm 5X optical zoom auto
focus lens , Support 128GB TF card



Two Way Audio

Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°20°/S

ASP39 1080P (1280*1080)

CMS Linkage alarm function
Support Wifi connection priority
IR board: 6 pcs LED array
IR distance: 80M
2.7-13.5mm 5X optical zoom
auto focus lens
Waterproof IP66;
Support 128GB TF card
Waterproof speaker
Power AC 110~240V



Two Way Audio

Radar detects
Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°20°/S

ASP39R 1080P (1280*1080)

CMS Linkage alarm function
Support Wifi connection priority
IR board: 6 pcs LED array
IR distance: 80M
2.7-13.5mm 5X optical zoom
auto focus lens
Radar detects moving body
turns on white light alert
Colorful all day
Waterproof IP66;
Support 128GB TF card
Waterproof speaker
Power AC 110~240V

Surveillance LTE (4G) IP Camera

ASP60 12.0MP/3.0MP/5.0MP



Two Way Audio



Pan tilt rotation.
8 preset points
horizontal:355°20°/S
vertical:90°20°/S

2.5" mini dome
CMS Linkage alarm function
Support Wifi connection priority
IR board: 6 pcs LED array
IR distance: 30-60M
2.7-13.5mm 5X optical zoom
auto focus lens
Waterproof IP66;
Support 128GB TF card
Waterproof speaker
Power 12V2A



Two Way Audio



ASP69 1080P (1280*1080) ASP79 5.0MP (2560 * 1920)

Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°30°/S

H.265 4.5" Speed Dome
CMS Linkage alarm function
Support Wifi connection priority
IR Star light IR distance: 20-80M;
4.7-147mm 30X optical zoom
auto focus lens
Waterproof IP66 Support 128GB TF card
Waterproof speaker
Power AC 110~240V

ASP41 1080P (1280*1080)




Pan tilt rotation.
255 preset points
horizontal:360°
vertical:90°
0.05~280°/S

H.265 7" Speed Dome
CMS Linkage alarm function
Support Wifi connection priority
IR board: 4pcs array 42Mil+4pc
laser infrared LEDs
IR distance: 150M;
4.6-84mm 20X optical zoom
auto focus lens
Waterproof IP66
Support 128GB TF card
support RJ45 wired & wifi
Power 12V4A



ASP42 960P (1280*960) ASP43 1080P (1280*1080)

Car Parking license plate recognition
IR board: 6 pcs LED array;
IR distance: 80~200M;
3.0MP lens 2.8-12mm 4X optical zoom auto focus lens
Option : 6mm-22mm lens
1.8" LCD display speed selection
(Mode: Parking / Road)
(Speed:30,60,90,120,150,180KM/h)
(HSBLC:Auto,Low,Medium,Higher,High)
(WDR:Off,Low,Medium,Higher,High)
(Scene Brightness:Auto,Low,Medium,Higher,High)
(LED Light brightness (0~13)degree is adjustable)
(CDS Start:Set up IR Sensitivity, Value Up,IR Light Star)
(Snapshot:Open/Close)
Waterproof IP66;
Support 128GB TF card
support RJ45 wired & wifi
Power 12V2A 48V PoE Option

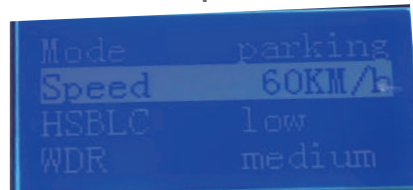

ASP71 2.0MP ZOOM 30 ASP72 2.0MP ZOOM 36 ASP73 5.0MP ZOOM 30



Pan tilt rotation.
255 preset points
horizontal:360°
vertical:90°
0.05~280°/S

H.265 7" Speed Dome
CMS Linkage alarm function
Support Wifi connection priority
IR board: 4pcs array 42Mil+4pcs
laser infrared LEDs
IR distance: 300M;
3.0MP Lens 4.7-147mm 30X
100mm~1000mm
optical zoom auto focus lens
Waterproof IP66
Support 128GB TF card
support RJ45 wired & wifi
Power 12V4A

Solar System



AIR-S3-16
30W Solar PV
lithium battery 16AH
Solar controller
Output power 12V
Bracket material iron



AIR-S6-30
60W Solar PV
lithium battery 30AH
Solar controller
Output power 12V
Bracket material iron



AIR-S6-40
60W Solar PV
lithium battery 40AH
Solar controller
Output power 12V
Bracket material iron



AIR-S6-50
60W Solar PV
lithium battery 50AH
Solar controller
Output power 12V
Bracket material iron



AIR-S6-60
60W Solar PV
lithium battery 60AH
Solar controller
Output power 12V
Bracket material iron



AIR-S8-50
80W Solar PV
lithium battery 50AH
Solar controller
Output power 12V
Bracket material iron

Surveillance Wifi / wired IP CAMERA



AS92 1080P (1280*1080)
 CMS Linkage alarm function;
 IR board: 6 pcs LED array;
 Pan tilt control, horizontal:255°&
 vertical:65°
 IR distance: 70M
 Lens: 4mm(3M Pixels)
 Support 128GB TF card
 Strong signal double
 Power DC 12V1A



AS46 1080P (1280*1080)
 Car Parking license plate recognition
 IR board: 4 pcs LED array;
 IR distance: 80~200M;
 3.0MP lens 2.8-12mm or 6-22mm
 4X optical zoom auto focus lens
 Option : Varifocal/Manual 5-50mm Lens
1.8" LCD display speed selection
 (Mode: Parking / Road)
 (Speed:30,60,90,120,150,180KM/h)
 (HSBLC:Auto,Low,Medium,Higher,High)
 (WDR:Off,Low,Medium,Higher,High)
 (Scene Brightness:Auto,Low,Medium,Higher,
 (LED Light brightness (0~13)degree is adjust
 (CDS Start:Set up IR Sensitivity, Value Up,IR I
 Start Later) (Snapshot:Open/Close)
 Waterproof IP66;
 Support 128GB TF card
 support RJ45 wired & wifi
 Power 12V2A 48V PoE Option
 Optional Fan for Hot weather



AS93 1080P

AS86 1080P (1280*1080)



Radar detects
Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°20°/S

CMS Linkage alarm function
 IR board: 6 pcs LED array ,IR distance: 80M
 2.7-13.5mm 5X optical zoom auto focus lens
 Radar detects moving body
 turns on white light alert
 Colorful all day:Waterproof IP66;
 Support 128GB TF card
 Waterproof speaker
 Power AC 110~240V



AS49 960P (1280*960)
AS50 1080P (1920*1080)

Sound & Light warning
DIY Warning by APP
 Metal Wifi Bullet PIR Camera, IP66
 IR LED: 4pcs, IR Range: 25M
 Lens: 4mm(2M Pixels)
 Wifi distance 100M, Built-in TF Card slot
 Support Onvif, Human Detection
 Support email alert trigger by Motion detection
 Wifi connect by scan QR codes, wifi one key connection
 Built in PIR Alarm, Push alarm to smart phone or CMS
 Power : DC 12V1A



AS51 2.0MP/3.0MP/5.0MP

Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°30°/S

2.5" mini dome
 CMS Linkage alarm function
 IR board: 6 pcs LED array
 IR distance: 30-60M
 2.7-13.5mm 5X optical zoom
 auto focus lens
 Waterproof IP66;
 Support 128GB TF card
 Waterproof speaker
 Power 12V2A



Pan tilt rotation.
horizontal:300°
vertical:60°

AS81 960P (1280*960)
AS82 1080P (1920*1080)

CMS Linkage alarm function;
 IR board: 4 pcs LED array;
 Pan tilt control, horizontal:300° &
 vertical:60° , IR distance: 60M;
 2.7-13.5mm 5X optical zoom auto
 focus lens , Support 128GB TF card



Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°20°/S

AS84 2.0MP/3.0MP/5.0MP

CMS Linkage alarm function
 IR board: 6 pcs LED array
 IR distance: 80M
 2.7-13.5mm 5X optical zoom auto focus lens
 Waterproof IP66;Waterproof speaker
 Support 128GB TF card, Power AC 110~240V

AS52 2.0MP/3.0MP/5.0MP



Pan tilt rotation.
horizontal:355°20°/S
vertical:90°20°/S

2.5" mini dome lens 2.7~13.5mm
 CMS Linkage alarm function;
 Support Wifi connection priority
 Waterproof IP66 Power 12V2A
 When someone approaches, turn on the
 white light, activate the siren, and turn on
 the red and blue flashing lights.
 IR distance: 40M Night Vision



Pan tilt rotation.
255 preset points
horizontal:360°
vertical:90°
0.05~280°/S

AS87 1080P (1280*1080)

H.265 7" Speed Dome
 CMS Linkage alarm function
 IR board: 4pcs array 42Mil+4pcs
 laser infrared LEDs
 IR distance: 150M;
 4.6-84mm 20X optical zoom
 auto focus lens
 Waterproof IP66
 Support 128GB TF card
 Power 12V4A



Pan tilt rotation.
255 preset points
horizontal:360°
vertical:90°
0.05~280°/S

AS88 1080P (1280*1080)

H.265 7" Speed Dome
 CMS Linkage alarm function
 IR board: 4pcs array 42Mil+4pcs
 laser infrared LEDs
 IR distance: 300M;
 3.0MP Lens 4.7-147mm 30X
 100mm~1000mm
 optical zoom auto focus lens
 Waterproof IP66
 Support 128GB TF card
 Power 12V4A



AS89 1080P (1280*1080)

Pan tilt rotation.
8 preset points
horizontal:355°40°/S
vertical:90°30°/S

H.265 4.5" Speed Dome
 CMS Linkage alarm function
 IR distance: 20-80M;
 4.7-94mm 22X optical zoom
 auto focus lens
 Waterproof IP66
 Support 128GB TF card
 Waterproof speaker
 Power AC 110~240V

Surveillance Wifi / wired IP CAMERA



Radar detects
Pan tilt rotation.
horizontal:355°20°/S
vertical:90°20°/S

ASC1
2.0MP lens 6MM 7102C-1+2023
3.0MP lens 6mm HI3516EV200+SC3235
5.0MP lens 6mm HI3516EV300+IMX335
2.0MP 5X (2.7-13.5MM) HI3516EV200+SC2232
3.0MP 5X (2.7-13.5MM) HI3516EV200+SC3235
5.0MP 5X (2.7-13.5MM)HI3516EV300+IMX335

CMS Linkage alarm function
Support voice pick up & speaker
IR board: 4pcs Array Infrared LEDs or 2pcs White Supplement LEDs.
LED light full on 10W support always on, PIR or no moving object bright 2W
IR distance: 60M Night Vision
Built-in 15 meters recording function, built-in subwoofer can talk to 40 meters
Support 64GB TF card
Power 12V2A



1080P HD surveillance camera
4 channel CCTV waterproof night vision
wireless monitoring set system kits
Lens 3.6mm
Working humidity -20~80(°C)
Power parameter 90-240(V)
Low illumination 0.01(Lux)



1080P HD surveillance camera
8 channel CCTV waterproof night vision
wireless monitoring set system kits
Lens 3.6mm
Working humidity -20~80(°C)
Power parameter 90-240(V)
Low illumination 0.01(Lux)

NVR H.265/H.264



AIR-NVR5-8
*1U chassis,
*5MP*8 and backward compatible, VGA/HDMI synchronous output,
*1 SATA hard drive support, capacity supports up to 6T hard drive,
*2 USB interfaces
*Support dual stream, up to 4 channels of real-time simultaneous playback,
*Without 485, with audio output, the highest sub-stream can reach D1,
*HDMI output resolution can support 1080P
*Onvif protocol



AIR-NVR5-16
*1U chassis
*5MP*16 and backward compatibility, VGA/HDMI synchronous output
*1 SATA hard drive capacity supports up to 6T hard drive
*2 USB interfaces, support dual stream
*Support up to 4 channels of real-time simultaneous playback
*Without 485, with audio output, the highest sub-stream can reach D1
*HDMI output resolution can support 1080P
*Onvif protocol



AIR-NVR5-16P



*1U chassis
*8MP*16 and backward compatibility, VGA/HDMI synchronous output
*2 SATA hard disk support, single hard disk capacity up to 6T hard disk
*2 USB ports
*Support dual stream, up to 4 channels of real-time simultaneous playback
*Without 485, with audio output, the highest sub-stream can reach D1
*HDMI output resolution can support 2K, 2G memory
*Onvif protocol



AIR-NVR5-32P



*1U chassis
*8MP*32 and backward compatible, VGA/HDMI synchronous output
*2 SATA hard drives, single hard drive capacity up to 6T hard drive
*2 USB ports
*Support for dual stream, up to 4 channels for real-time simultaneous playback
*Without 485, with audio output, the highest sub-stream can reach D1
*HDMI output resolution can support up to 4K
*Onvif protocol

Networking Devices

Turns Your Slow WiFi Into a Next-Generation High Speed Line
Powerful Wi-Fi in every single corner of your home



2.4 Ghz frequency Gets through to any corner of your home
 300Mbps wireless rate Faster than anything you'll ever need
 Universal compatibility Works with old and new WiFi networks
 Easy install - no CD required Just plug it in
 Color: White
 Plug Type: EU/US/AU/UK Plug
 Voltage: AC 110-240V
 Frequency Range: 2.41-2.48GHz
 Networking Cable Length: Approx. 1m
 RF gain 100mW
 Antenna gain 3dBi internal x2

AIR-RP2T2R

AirLink UltraSky 4G Industrial Indoor Router



Ultrasky4G-ID

EXTERNAL ANTENNA 5dBi *3



Features:



4* LAN PORT

4G main chip: ZX297520M , WiFi Chip RTL8192ES
 DC power input range 7~35V
 Support 2.4GHz IEEE802.11bgn 300Mbps(2T2R);
 Support WEB, SSH encryption communication, set software multiple parameter management methods,
 Support 4 Ports 10/100Mbps LAN
 Support WEB mode firmware upgrade
 Support Reset default
 Power 12V /2A Supports 7-35V wide voltage
 Support -40°C ~ +75°C , Non-operating temperature: -45°C to 80°C
 Support VPN, VPDN, PPTP Client L2TP Client ,APN private network access
 Support NTP network timing
 Support DHCP server to automatically obtain IP
 Support DNS domain name resolution
 Support various routing functions: static routing, port forwarding, network diagnosis, DDNS dynamic domain name resolution;
 Support firewall
 Support port mapping: support mapping from external network port to intranet port
 Support static routing table
 Support CDMA, WCDMA, GSM, D-SCDMA,EVO,TDD-LTE, FDD-LTE
 Support SMS, restart, offline

Application Fields:
 Mobile Hotspot
 Industrial Routing
 Automotive and Transportation
 Green Energy
 Wireless Payment
 Smart Metering
 Personal Tracking
 Car-mounted DVR
 Smart Industry
 Medical Surveillance
 Charging Pile
 Video Surveillance etc.

AIR-AC1200B



2T2R 802.11n 2.4GHz WiFi speed up to max 300Mbps data rate
 2T2R 802.11ac 5GHz WiFi speed up to max 867Mbps data rate
 Complies with USB Specification 3.0/ 2.0
 Compatible with IEEE 802.11b/g/n/a/ac Specifications
 Supports WPA, WPA2. MU-MIMO (Multi-User MIMO)

AIR-AC1200M



2T2R 802.11n 2.4GHz WiFi speed up to max 300Mbps data rate.
 2T2R 802.11ac 5GHz WiFi speed up to max 867Mbps data rate.
 Complies with USB Specification 3.0/ 2.0
 Compatible with IEEE 802.11b/g/n/a/ac Specifications.
 Supports WPA, WPA2 ,MU-MIMO (Multi-User MIMO)
 Long range with 2 * 5 dBi antenna
Flexible install with desk holder cable

AIR-BW

WiFi + Bluetooth adaptor



1T1R 802.11n 2.4GHz WiFi speed up to max 150Mbps data rate.
 Bluetooth 4.0 distance 25.3M Adaptive Frequency Hopping
 Complies with USB Specification 3.0/ 2.0
 Compatible with IEEE 802.11b/g/n Specifications.
 Supports WPA, WPA2, MU-MIMO (Multi-User MIMO)

AIR-AC1750M USB AC Adaptor



1)2T2R 802.11n 2.4GHz WiFi speed up to max 450Mbps data rate.
 2)2T2R 802.11ac 5GHz WiFi speed up to max 1300Mbps data rate.
 3)Complies with USB Specification 3.0/ 2.0
 4)Compatible with IEEE 802.11b/g/n/a/ac Specifications.
 5)Supports WPA/WPA2/WEP/802.1X/WMM
 6)Supports MU-MIMO (Multi-User MIMO)
 7)Support soft AP

M27 5GHZ CPE MAX 3KMS



M27 CPE 5GHZ High power + 14dbi antenna for camera P2P max 3KMs
 Software designed for video bridge

Antennas

LTE Antenna 698-2700MHz



Part Number : AirLink LTEOC5

Omni Ceiling Antenna

Frequency Band,MHz	698-800	800-960	1710-2700
Gain,dBi	1.5	1.5	5
VSWR	≤1.8	≤1.5	≤1.5
PIM,3rd Order,2×20W,dBc	≤-140		
Polarization	Vertical		
Beamwidth, Horizontal	360		
Input Impedance,ohms	50		
Input Power,max.watts	50		



Part Number : AirLink LTEP8

Directional Wall Mount Antenna

Frequency Band,MHz	698-800	800-960	1710-2700
Gain,dBi	6	7	8
VSWR	≤1.8	≤1.8	≤1.5
PIM,3rd Order,2×20W,dBc	≤-140		
Polarization	Vertical		
Beamwidth, Horizontal	95	95	65
Beamwidth, Vertical	75	70	60
Input Impedance,ohms	50		
Input Power,max.watts	50		



Model AIR-LTEOP13 Outdoor Types

Frequency range (MHz)	1700-2700MHz		
Gain (dBi)	2*13		
Beam width E-Plane	35°	H-Plane	38°
VSWR	<1.8		
Front to back ratio (dB)	>20		
Polarization	±45°		
Max power (W)	50		
Impedence (Ω)	50		
Lightning Protection	Direct Ground		
Connector	2*SMA Cable 2*5Meters		
Dimensions L×W×H (mm)	200*200*40		



Part Number : AirLink LTECM5

Omni Dual Polarization MIMO Ceiling Antenna

Frequency Band,MHz	Port 1		Port 2	
	698-800	800-960	1710-2700	1710-2700
Gain,dBi	1.5	1.5	5	4
VSWR	≤1.9	≤1.8	≤1.8	≤1.8
PIM,3rd Order,2×20W,dBc	≤-140		≤-140	
Polarization	Vertical		Horizontal	
Beamwidth, Horizontal	360		360	
Input Impedance,ohms	50		50	
Input Power,max.watt	50		50	



Part Number : AirLink LTEPM8

MIMO Dual Polarization Indoor Directional

Frequency Band,MHz	Port 1		Port 2	
	698-800	800-960	1710-2700	1710-2700
Gain,dBi	6	6	7.5	8
VSWR	≤1.8	≤1.5	≤1.5	≤1.5
PIM,3rd Order,2×20W,dBc	≤-140			
Polarization	Vertical		Horizontal	
Beamwidth, Horizontal	95	65	65	65
Input Impedance,ohms	50			
Input Power,max.watts	50			

2.4GHZ / 5GHz



Sector Antenna

Beam width E-Plane 7° H-Plane 120°

ALWO-5815PM(5150-5850MHz)	Gain: 2*15dBi
ALWO-5817PM(5150-5850MHz)	Gain: 2*17dBi
ALWO-5819PM(5150-5850MHz)	Gain: 2*19dBi
ALWO-2417PM(2400-2485MHz)	Gain: 2*17dBi
ALWO-2419PM(2400-2485MHz)	Gain: 2*19dBi



Part Number : AirLink LTECML5

Omni Dual Polarization MIMO Linear V Ceiling Antenna

Frequency Band,MHz	698-800	800-960	1710-2700
Gain,dBi	2.5	2.5	5
VSWR	≤1.8	≤1.6	≤1.6
PIM,3rd Order,2×20W,dBc	≤-140	≤-140	≤-140
Isolation (typ.),dB	-18	-20	-20
Polarization	Vertical		
Beamwidth, Horizontal	360		
Input Impedance,ohms	50		
Input Power,max.watts	50		



Part Number : AirLink LTE-8- X-POL

MIMO Dual Polarization X-pol Wall Mount Antenna

Frequency Band,MHz	698-800	800-960	1710-2700
Gain,dBi	7	8	8
VSWR	≤1.8	≤1.6	≤1.6
PIM,3rd Order,2×20W	≤-140		
Isolation (typ.),dB	-20	-20	-23
Polarization	±45°X		
Beamwidth, Horizontal	70	65	60
Beamwidth, Vertical	68	65	60
Input Impedance,ohms	50		
Input Power,max.watts	50		

2.4GHZ / 5GHz



MIMO OMNI

Beam width H-Plane: 360° V-Plane: 7°

ALWO-24130M	2.4GHz Outdoor Omni 2*13 dBi Antenna
ALWO-58130M	5GHz Outdoor Omni 2*13 dBi Antenna

Smart Home Starter Packages



SECURITY 2.4GHz

- MIMO Gateway*1
- 1080P 2.0MP IP camera*1
- Wireless Door & Window Contact*2
- PIR Detection Sensor*1
- Smoke Alarm Sensor*1



ELECTRICITY 2.4GHz

- MIMO Gateway*1
- Smart outlet 10A*4
- Smart outlet 16A*2
- AC Switch*2




ATMOSPHERE 2.4GHz

- MIMO Gateway *1
- RGB Socket *2
- RGB LED Bulb 7W *4
- 5M Light Strip *1





AIRLINK

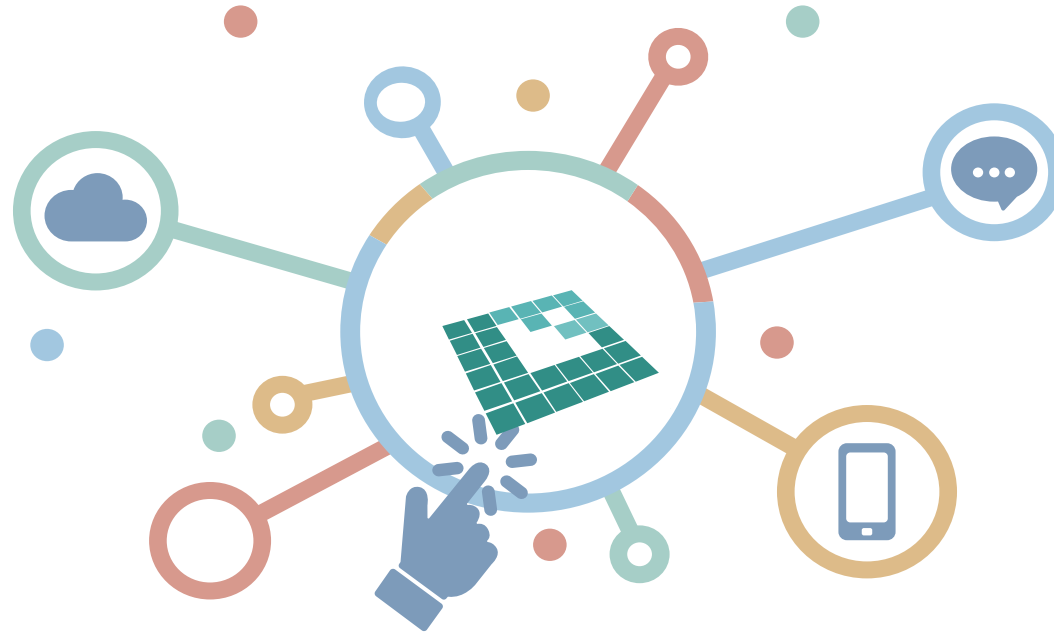

GET IN TOUCH

Company : AirLink iLife Inc.

Website: www.airlink-ilife.com

Email: sales@airlinkwifi.net

Skype: myihome88

